


Product Data Sheet

Fixodrive® FX 50

Order No. 3150

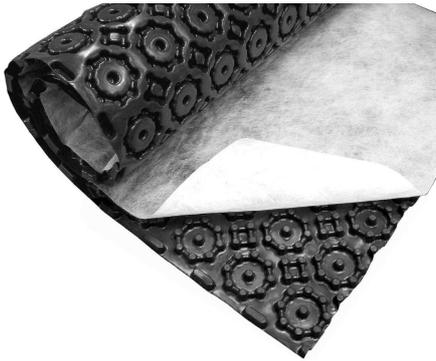

Driveable and quickly installed protection and drainage mat with attached filter sheet to be used under intensive green roofs as well as driveways and footpaths.



Technical Data

Fixodrive® FX 50

Protection and drainage mat with attached filter sheet, connectable interlocking studs on the longitudinal sides, strong enough to be used under driveways.

Material: Polypropylene
 Colour: grey / white
 Height: ca. 20 mm
 Weight: ca. 1.5 kg/m²

Max. compressive strength: ca. 500 kN/m²
 Strength class of the filter sheet: 3

In-plane water flow rate according to EN ISO 11058: ca. 25 l/s

In-plane water flow capacity (EN ISO 12958):
 roof slope 1%: ca. 0.36 l/(s·m)
 roof slope 2%: ca. 0.52 l/(s·m)
 roof slope 3%: ca. 0.65 l/(s·m)


Dimensions:
 Roll width: ca. 1.00 m
 Roll length: ca. 15.00 m

Features

- interlocking studs form a coherent connected area of the single rolls
- high pressure resistance allows usage of light construction vehicles
- diffusion-open due to perforation
- tested drainage capacity according to EN ISO 12958
- quick and easy installation
- 100 % Polypropylene

Application Example

"Driveway for Cars"

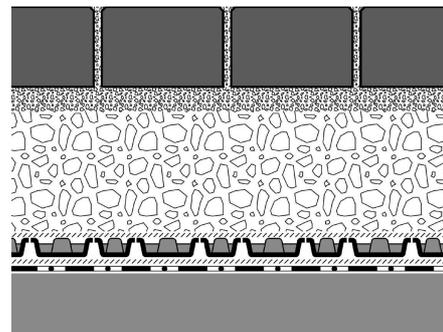

Paving slabs
 Bedding layer

 Gravel layer
 at least 150 mm
 Fixodrive® FX 50
 Filter Sheet PV
 Roof construction with waterproofing

Specification Suggestion

Protection and drainage sheet with attached filter sheet made of polypropylene, strength class 3, openings for diffusion, height ca. 20 mm, in-plane water flow capacity tested according to EN ISO 12958, max. compressive strength up to

500 kN/m², delivery and installation according to manufacturer's instructions.

Make: ZinCo Fixodrive® FX 50
 Enquiries: ZinCo Canada Inc.
 Phone: 1-905-690-1661

