


Product Data Sheet

Irrigation Unit B 32

Order No. 4031

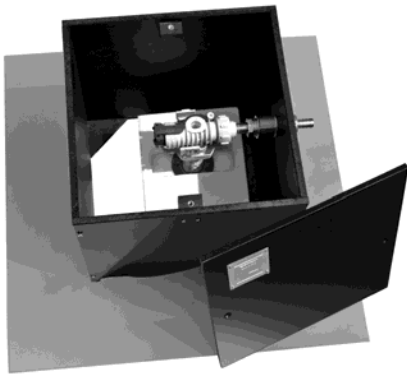

Inspection chamber/Irrigation unit for intensive green roof build-ups for up to 400 m² of surface.



Technical Data

Irrigation Unit B 32

Made of 100% polyethylene with large, load distributing support footing. Swimmer-controlled valve for automatic dam-up irrigation. Water supply via 1/2" pipe; lockable lid.

Colour:	black
Height:	ca. 320 mm
Outer dimension of the Chamber:	ca. 300 mm x 300 mm
Aperture dimension:	ca. 270 x 270 mm
Weight:	ca. 7.0 kg
Minimum permissible water pressure:	ca. 1.0 bar (14.5 psi)
Maximum permissible water pressure:	ca. 6.0 bar (87 psi)
Adjustable dam-up height:	ca. 30–100 mm
Adjustment range:	< 5 mm

Accessories:

Extension Piece KSA 15-PE	Order No. 4016
Height:	ca. 150 mm


Also available in stainless steel upon request.

Features

- tested and proven swimmer-controlled automatic irrigation unit
- water-bearing materials made of moisture-resistant components
- durable functionality due to dirt filter in the pipe connection
- easy installation and maintenance
- lockable lid
- large load distributing support footing
- stable plastic body
- the on-site water connection needs to comply with European Standard EN 1717 and with all relevant local and national regulations, in particular regarding backflow prevention

Application Example

"Roof Garden with FD 60 neo"

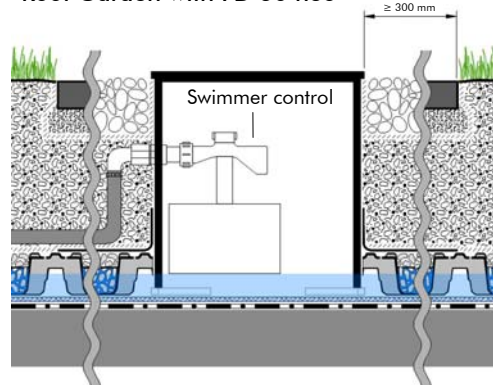

Specification Suggestion

Irrigation unit made of 100% polyethylene, swimmer controlled, lockable lid, minimum permissible water pressure ca. 1.0 bar (14.5 psi), maximum permissible water pressure ca. 6.0 bar (87 psi), height ca. 320 mm, outer dimensions of the chamber ca. 300 x 300 mm, aperture dimensions

ca. 270 x 270 mm, weight ca. 7.0 kg, delivery and installation according to manufacturer's instructions including all additional connecting parts.

Make: ZinCo Irrigation Unit B 32
Enquiries: ZinCo GmbH,
Phone: +49 7022 6003-0