

## Walkway with pedestal pads


For restricted heights

With the Elastoring walkway pedestal pads, roof pavers and wood decking can be installed on roofs with shallow build up heights. The Elastoring eliminates the use of bedding material and drainage layer, and as a result only the weight of the surface has to be taken into consideration. Surface water can be drained quickly and easily through the open joints (created by the cross spacer) and into the lower cavity.


### ELASTORING ER

The ZinCo Elastoring ER are flat rubber pads that are used to lift roof pavers or wood decking off the waterproofing membrane to prevent sharp concrete slab or wooden sleeper coming in contact with the waterproofing membrane. It comes in heights of 5 mm, 10 mm, 15 mm and 25 mm.

### Assembly:

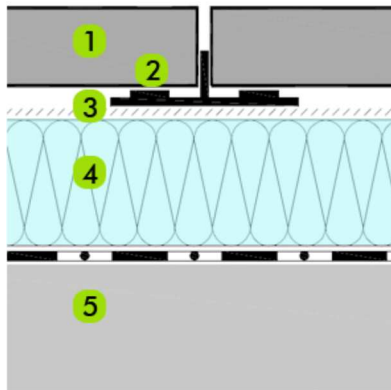

1. Roof Paver
2. ZinCo Elastoring ER
3. ZinCo Diffusion membrane TGV21
4. XPS Rigid Insulation
5. Roof Construction with Waterproofing Membrane

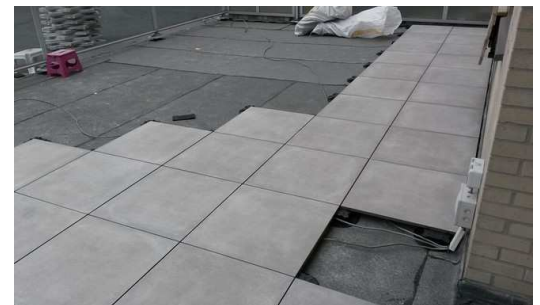

### Features:

- Compact and light weight
- Minimum maintenance
- Easy installation
- For restricted heights

Slope: Follows the roof slope  
Load Capacity: 500 kg per pedestal  
Height: 55-75 mm (2"-3")



## SHALLOW

# INNOVATING WITH NATURE

## Walkway with pedestal pads

For restricted heights



ZinCo Elastoring Pedestal pad made of synthetic rubber. Designed for pavers on flat roofs with a shallow build-up height. Including spacers, leveling pieces and load distribution plates. Heights: 5 mm, 10 mm, 15 mm and 20 mm.

Product	Art. Nr.	Size of Delivery
Elastoring ER5	9630	Box of 100 pieces
Elastoring ER10	9631	Box of 100 pieces
Elastoring ER15	9632	Box of 100 pieces
Elastoring ER20	9633	Box of 100 pieces
Leveling rings	9635	Box of 100 pieces




ZinCo load distribution plate made of synthetic rubber. Designed to distribute the point loads of the pedestals over the roof deck. Size: 200 x 200 x 40 mm.

Product	Art. Nr.	Size of Delivery
Load distribution plate	9634	Box of 50 pieces



ZinCo Terrace grill or facade grill TR-F/FR-F made of galvanized steel. Opening size: 44 mm x 11 mm. Designed in combination with the Elastoring pedestal for areas with a higher water accumulation and at roof drain locations. Sizes: see below.

Product	Art. Nr.	Size of Delivery
TR-F 40x40x4 cm	4210	Piece
TR-F 40x40x5 cm	4213	Piece
TR-F 50x50x5 cm	4215	Piece

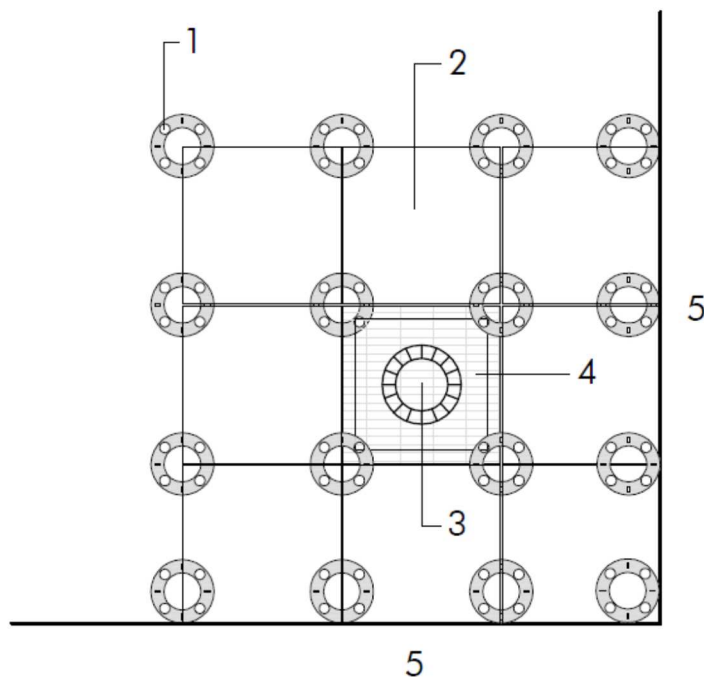

- 1 ZinCo Elastoring Pedestal Pad
- 2 Roof Paver
- 3 Roof Drain
- 4 ZinCo Terrace Grill
- 5 Wall or Parapet Connection