


Product Data Sheet

Railing System SG 40-S

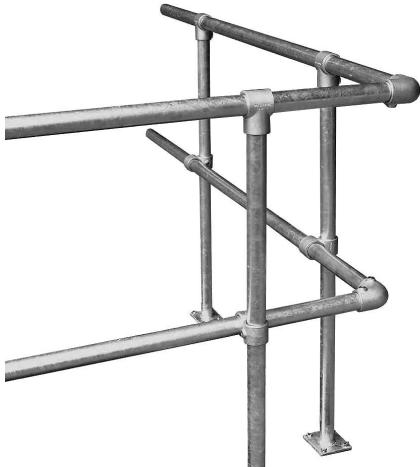

Functional and stable railing, made of galvanized steel, adapted to the Guardrail Base GB, for installation without any roof penetration and drilling.

Technical Data

Railing System SG 40-S

Functional and stable railing made of galvanized steel, adapted to the Guardrail Base GB, for installation without any roof penetration and drilling.

The Railing System SG 40-S consists of:

| | |
|---------------|--------------------------------|
| Railing Post: | Ø 42 x 3 mm, Length ca. 1.20 m |
| Handrail: | Ø 42 x 3 mm, Length ca. 6.00 m |
| Midrail: | Ø 34 x 3 mm, Length ca. 6.00 m |

Handrail Support

Midrail Support

Also available: 90°-Corner Joints, Couplings, End pieces, etc.

For detailed information please contact the ZinCo technical department.

Features

- quick and easy installation, without any roof penetration in combination with the Guardrail Base GB
- quick on-site assembly due to system design
- user-friendly installation (no welding, plastering, sanding or drilling necessary)
- stable design, also suitable for escape routes and fall protection while working on flat roofs
- easy to repair, since the system can be easily disassembled and single components can be replaced

Accessories

Handrail with Handrail Support



Midrail with Midrail Support



90°-Corner Joint for Handrail or Midrail



Specification Suggestion

Railing system made of galvanized steel.
 Posts adaptable for ZinCo-Guardrail Base GB/GB Corner, handrail of circular tube Ø 42 x 3 mm, with midrail(s) of circular tube Ø 34 x 3mm.
 Delivery and installation according to manufacturer's instructions.

Running meters of railing: m
 number of posts: qty
 corners outside/inside: /.... qty
 Wall connection: qty

Make: ZinCo Railing System SG 40-E
 Enquiries: ZinCo GmbH,
 Phone: +49 7022 6003-0